

Table of Contents

Page

4	Services
5	Steel Angles
6	Steel Hot-Rolled Flats
7	Steel Hot-Rolled Rounds
8	Steel Rebar
9	Steel Hot-Rolled Squares
10	Steel Bar-Size Channels
11	Steel Structural Channels
12	Steel S Beams
13	Steel Wide Flange Beams
14	Steel Square Tubes
15	Steel Rectangular Tubes
16	Steel Pipe Sizes
17	Steel Welded Round Tubes
18	Steel Seamless DOM Tubes
19	Steel Cold-Rolled Rounds C 1018/1020
20	Steel Cold-Rolled Rounds C 12L14
21	Steel Cold-Rolled Rounds C 1144 Stressproof
22	Steel Round Drill Rods AISI W-1 and O-1
23	Steel Threaded Rods AISI C 1010 UNC
24	Steel Cold-Rolled Flats C 1018/1020
25	Steel Cold-Rolled Hexagons C 12L14
26	Steel Cold-Rolled Squares C 1018/1020
27	Steel Hot-Rolled Sheets
28	Steel Plates
29	Steel Floor Plates
30	Steel Abrasion Resistant Q & T Plates
31	Steel Cold-Rolled Sheets
32	Steel Galvanized Sheets
33	Steel Satin Coat (Galvanneal) Sheets
34	Steel Regular Expanded Sheets
35	Steel Flattened Expanded Sheets
36	Steel Expanded Structural Grating
37	Expanded Grating Selection Chart



Page

38	Steel Cold Rolled Perforated Sheets
39	Steel Galvanized Roof Deck RD-938
40	Steel Welded Wire Construction Fabric
41	Steel Architectural Welded Wire Mesh
42	Steel Ladder Rung
43	Steel Welded Bar Grating
44	Steel Galvanized Deck Span Planks
45	Steel Galvanized Deck Span Planks
46	Aluminum Angles Architectural 6063-T5
47	Aluminum Angles Structural 6061-T6
48	Aluminum Flats 6061-T6
49	Aluminum Rounds 6061-T6
50	Aluminum Channels
50	Aluminum Squares
51	Aluminum Pipe Sizes and Round Tubes
52	Aluminum Square Tube Architectural
53	Aluminum Rectangular Tube Architectural
54	Aluminum Square Tube Structural
55	Aluminum Sheets
56	Aluminum Plates
57	Aluminum Floor Plates
58	Stainless Angles
59	Stainless Flats
60	Stainless Rounds
61	Stainless Squares
62	Stainless Pipes and Welded Round Tubes
63	Stainless Square Tubes
64	Stainless Sheets and Plates
65	Brass Rounds B16-360
66	Brass Flats B16-360
67	Brass Squares B16-360
68	Brass Hexagons B16-360
69	Bronze Rounds SAE 660
70	Decimal Equivalents
70	Common Conversions

In addition to our full line of metal products, we provide the following value-added services:

- Cut to Length
 - Oxy-actylene
 - Bandsaw
 - Bar Shear
- Shear to Size
 - 1/16" thick through 3/8" thick
- Track torch cutting (for heavy plates)
- Delivery Service
 - Available weekdays in Ottawa for orders exceeding \$250.00
 - Available one day per week in Arnprior and Kemptville
 - Call for details
- Sheet and Plate Forming
 - Capacity up to 12' long of 3/8" mild steel, 7' long of 1/2" mild steel
- Sheet and Plate Rolling
 - Capacity up to 8' long of 1/4" mild steel
- Hole Drilling
- Hole Punching (round, square, oblong)
- Bar Threading (UNC)
- Beam Splices
- Brick Flanges
- Pipe Bending
- Welding

Please call, fax or e-mail us for a quote on your processing requirements.


STEEL ANGLES


Stock Lengths: 20 ft to 2 1/2", 40 ft for 3" and over

EQUAL LEG		UNEQUAL LEG	
Size Inches	Weight lbs per ft	Size Inches	Weight lbs per ft
1/2 X 1/2 X 1/8	.38		
3/4 X 3/4 X 1/8	.59		
1 X 1 X 1/8	.8		
3/16	1.16		
1/4	1.49		
1 1/4 X 1 1/4 X 1/8	1.01		
3/16	1.48		
1/4	1.92		
1 1/2 X 1 1/2 X 1/8	1.23		
3/16	1.8		
1/4	2.34		
1 3/4 X 1 3/4 X 1/8	1.44	2 X 1 1/2 X 3/16	2.12
1/4	2.77		
2 X 2 X 1/8	1.65		
3/16	2.44		
1/4	3.19	2 1/2 X 2 X 1/4	3.62
3/8	4.70		
2 1/2 X 2 1/2 X 3/16	3.07		
1/4	4.1		
3/8	5.9	3 X 2 X 3/16	3.1
3 X 3 X 3/16	3.7		
1/4	4.9		
3/8	7.2		
1/2	9.4	3 1/2 X 2 1/2 X 1/4	4.9
3 1/2 X 3 1/2 X 1/4	5.8		
3/8	8.5	3 1/2 X 3 X 3/8	7.9
4 X 4 X 1/4	6.6	4 X 3 X 1/4	5.8
3/8	9.8		
1/2	12.8	3/8	8.5
5 X 5 X 3/8	12.3	5 X 3 X 1/4	6.6
	1/2		16.2
		5/16	8.2
		5 X 3 1/2 X 1/4	7.0
		5/16	8.7
		3/8	10.4
6 X 6 X 3/8	14.9	6 X 4 X 5/16	10.3
1/2	19.6		
		3/8	12.3
		1/2	16.2
8 X 8 X 1/2	26.4	8 X 4 X 1/2	19.6


HOT ROLLED STEEL BARS
Mild Steel Flats

Stock Lengths 20 ft

Size Inches	Weight lbs per ft	Size Inches	Weight lbs per ft
1/8 X 1/2	0.2125	3/8 X 1	1.28
3/4	0.3188	1 1/4	1.59
1	0.425	1 1/2	1.91
1 1/4	0.5313	2	2.55
1 1/2	0.637	2 1/2	3.19
2	0.85	3	3.83
2 1/2	1.0625	4	5.1
3	1.275	5	6.38
4	1.7	6	7.65
5	2.125	8	10.2
6	2.55		
3/16 X 1/2	0.319	1/2 X 1	1.7
3/4	0.478	1 1/2	2.55
1	0.638	2	3.4
1 1/4	0.797	2 1/2	4.25
1 1/2	0.956	3	5.1
2	1.28	4	6.8
2 1/2	1.59	5	8.5
3	1.91	6	10.2
4	2.55	8	13.6
5	3.19		
6	3.83	5/8 X 2	4.25
		3	6.38
		4	8.5
1/4 X 1/2	0.425	3/4 X 1 1/2	3.825
3/4	0.637	2	5.1
1	0.85	3	7.65
1 1/4	1.06	4	10.2
1 1/2	1.28	5	12.75
2	1.7	6	15.3
2 1/2	2.13	8	20.4
3	2.55		
3 1/2	2.98	1 X 2	6.8
4	3.4	3	10.2
5	4.25	4	13.6
6	5.1	5	17
8	6.8	6	20.4
		8	27.2

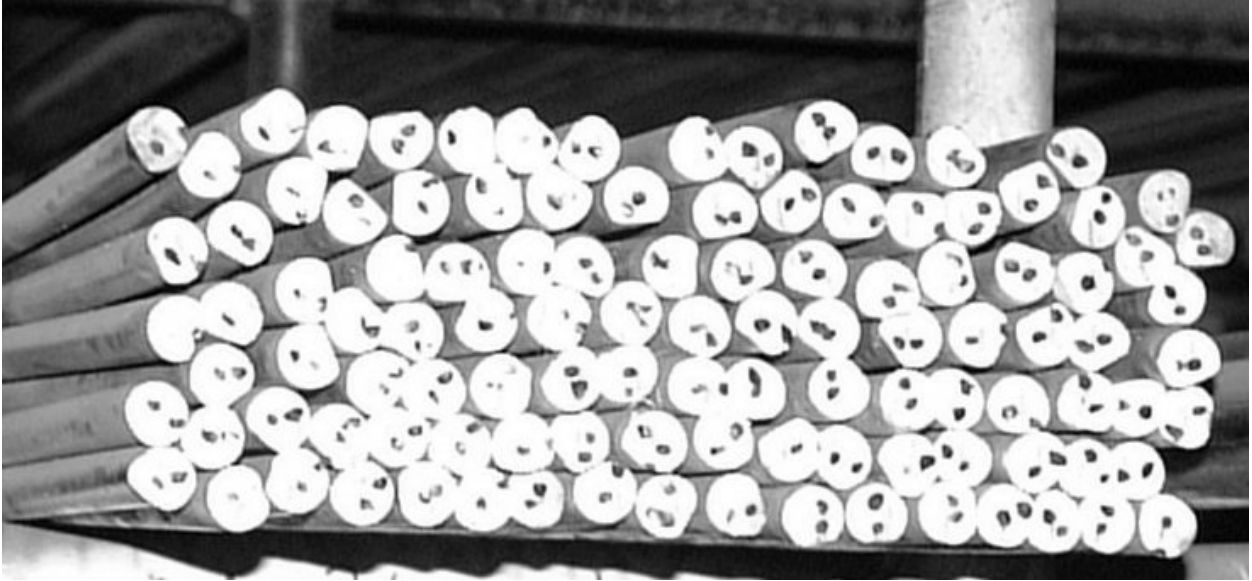

HOT ROLLED STEEL BARS

Mild Steel Rounds

Stock Lengths 20 ft

Diameter Inches	Weight lbs per ft
1/4	.167
5/16	.261
3/8	.376
7/16	.511
1/2	.668
9/16	.845
5/8	1.043
3/4	1.5
7/8	2.04
1	2.67
1 1/4	4.17
1 3/8	5.05
1 1/2	6.01
2	10.68
3	24.03
4	42.73




STEEL REBAR

Deformed Metric Rounds

Stock Lengths 6 metres

Size millimetres	Weight lbs per ft
10 M	0.528
15 M	1.055
20 M	1.583
25 M	2.638




**HOT ROLLED STEEL
BARS**

Mild Steel Squares

Stock Lengths 20 ft

Size Inches	Weight lbs per ft
3/8	.478
1/2	.85
5/8	1.33
3/4	1.91
1	3.4
1 1/4	5.31
1 1/2	7.65
2	13.6



STEEL CHANNELS

Bar Sizes


Stock Lengths 20 ft

Size Inches	Weight lbs per ft
1 X 1/2 X 1/8	0.8
1 1/4 X 1/2 X 1/8	1
1 1/2 X 1/2 X 1/8	1.13
2 X 1 X 1/8	1.78
2 X 1 X 3/16	2.57



**STRUCTURAL
STEEL CHANNELS**
Stock Lengths 40 ft

IMPERIAL					METRIC						
NAME		Flange		Web	Section	NAME		Flange		Web	Section
		Width	Thick-ness					Width	Thick-ness		
Depth	Weight	Width	Thick-ness	Thick-ness	Mod-ulus	Depth	Weight	Width	Thick-ness	Thick-ness	Mod-ulus
Inches @	lbs per ft					mm @	KG per metre				
C 3 @ 4.1		1.41	.273	.170	1.11	C 75 @ 6		35	6.9	4.3	17.6
5		1.5	.273	.258	1.23	7		37	6.9	6.6	19.7
6		1.6	.273	.356	1.38	9		40	6.9	9.0	22.3
C 4 @ 5.4		1.58	.296	.184	1.93	C 100 @ 8		40	7.5	4.7	31.6
7.25		1.72	.296	.321	2.30	11		43	7.5	8.2	37.4
C 5 @ 6.7		1.75	.320	.190	3.00	C 130 @ 10		44	8.1	4.8	48.6
9		1.88	.320	.325	3.56	13		47	8.1	8.3	57.6
C 6 @ 8.2		1.92	.343	.200	4.37	C 150 @ 12		48	8.7	5.1	70.6
10.5		2.03	.343	.314	5.07	16		51	8.7	8.0	81.9
C 7 @ 9.8		2.09	.366	.210	6.09	C 180 @ 15		53	9.3	5.3	99.6
C 8 @ 11.5		2.26	.390	.220	8.15	C 200 @ 17		57	9.9	5.6	133
13.75		2.34	.390	.303	9.03	21		59	9.9	7.7	147
C 9 @ 13.4		2.43	.413	.233	10.6	C 230 @ 20		61	10.5	5.9	173
C 10 @ 8.4		1.5	.280	.170	6.40	C 250 @ 12.5		38	7.1	4.3	105
15.3		2.6	.436	.240	13.5	23		65	11.1	6.1	219
C 12 @ 10.6		1.5	.309	.190	9.23	C 310 @ 15.8		38	7.8	4.8	151
20.7		2.94	.501	.282	21.5	31		74	12.7	7.2	351

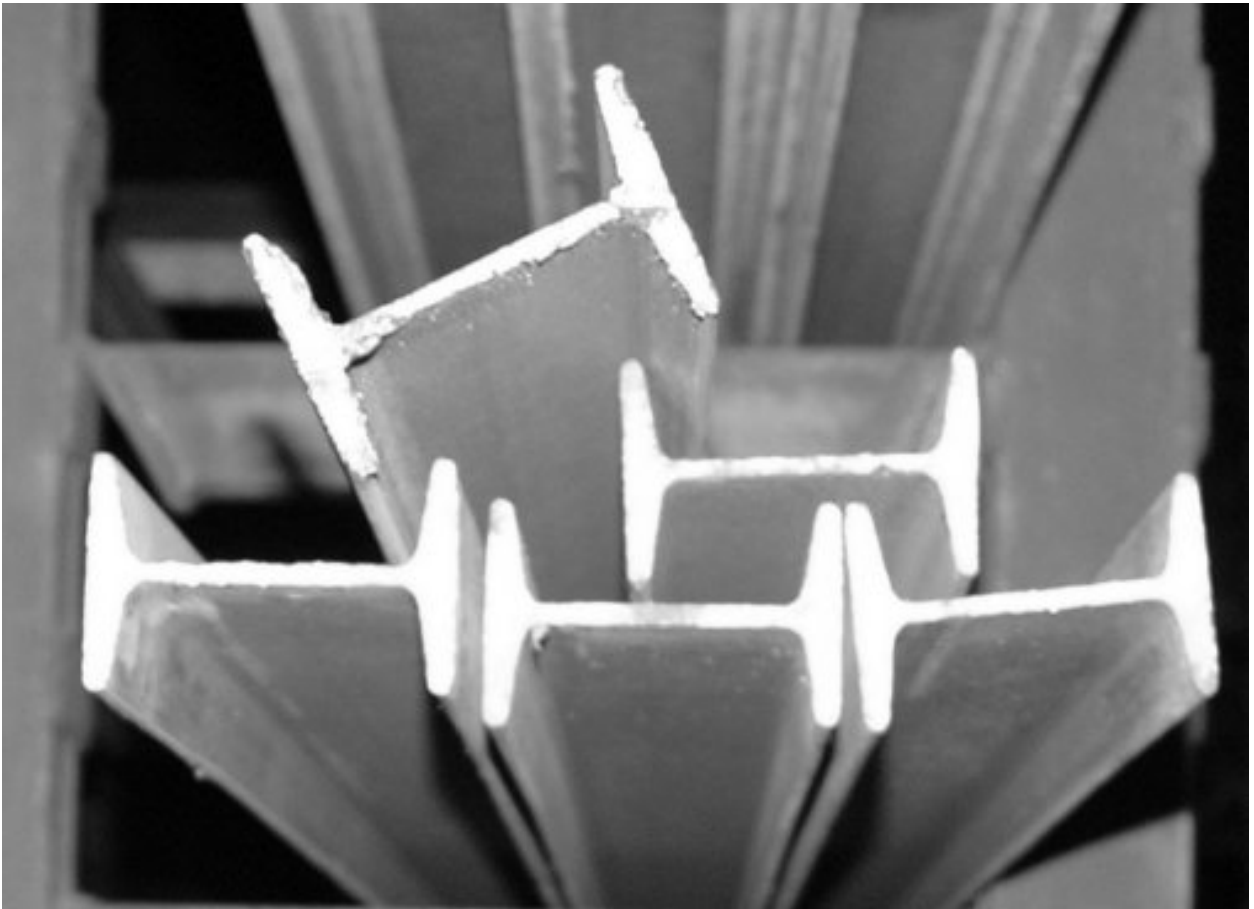

STEEL STANDARD BEAMS

IMPERIAL					METRIC							
NAME		Flange		Web	Section	NAME		Actual	Flange		Web	Section
		Width	Thick-ness						Width	Thick-ness		
Depth	Weight					Depth	KG per	Depth				
Inches	X lbs per ft	Inches	Inches	Inches	in³	mm X	metre	mm	mm	mm	mm	10³mm³
S 3 X 5.7		2.33	.260	.170	1.68	S 75 X 8		76	59	6.6	4.3	27.4
S 4 X 7.7		2.66	.293	.193	3.04	S 100 X 11		102	67	7.4	4.8	49.4
S 5 X 10		3.0	.326	.214	4.92	S 130 X 15		127	76	8.3	5.3	80.4
S 6 X 12.5		3.33	.359	.232	7.37	S 150 X 19		152	84	9.1	5.8	119
S 8 X 18.4		4.0	.425	.271	14.4	S 200 X 27		203	102	10.8	6.9	237



STEEL WIDE FLANGE BEAMS

IMPERIAL						METRIC							
NAME		Actual Depth	Flange		Web Thick- ness	Section Mod- ulus	NAME		Actual Depth	Flange		Web Thick- ness	Section Mod- ulus
Rough Depth	Weight		Width	Thick- ness			Rough Depth	Weight		Width	Thick- ness		
Inches	X lbs per ft	Inches	Inches	Inches	Inches	in³	mm X	KG per metre	mm	mm	mm	mm	10³mm³
W 4 X 13		4.16	4.06	.345	.280	5.46	W 100 X 19		106	103	8.8	7.1	89.9
W 6 X 15		5.99	5.99	.260	.230	9.72	W 150 X 22		152	152	6.6	5.8	159
20		6.20	6.02	.365	.260	13.4	30		157	153	9.3	6.6	219
25		6.38	6.08	.455	.320	16.7	37		162	154	11.6	8.1	274
W 8 X 18		8.14	5.25	.330	.230	15.2	W 200 X 27		207	133	8.4	5.8	249
21		8.28	5.27	.400	.250	18.2	31		210	134	10.2	6.4	299
24		7.93	6.50	.400	.245	20.9	36		201	165	10.2	6.2	342
28		8.06	6.54	.465	.285	24.3	42		205	166	11.8	7.2	399
31		8.0	8.00	.435	.285	27.5	46		203	203	11.0	7.2	448
W 10 X 22		10.17	5.75	.360	.240	23.2	W 250 X 33		258	146	9.1	6.1	379
W 10 X 26		10.33	5.77	.440	.260	27.9	W 250 X 39		262	147	11.2	6.6	459
W 10 X 33		9.73	7.96	.435	.290	35.0	W 250 X 49		247	202	11.0	7.4	572
W 12 X 26		12.22	6.49	.380	.230	33.4	W 310 X 39		310	165	9.7	5.8	549



**SQUARE STEEL TUBING or
HOLLOW STRUCTURAL SECTIONS (H.S.S)**

Stock Lengths 24 ft to 5", 48 ft for 6" and over

IMPERIAL					METRIC				
Size Inches	Thickness Inches	Weight Lbs per ft.	Area Sq. Inches	Radius of Gyration (in.)	Size Millimeters	Thickness Millimeters	Mass KG per M	Area Sq. mm	Radius of Gyration (mm)
1/2 X 1/2 X .065		.384			12.7 X 12.7 X 1.65		.576		
3/4 X 3/4 X .083		.75			19 X 19 X 2.12		1.12		
1 X 1 X .065		.83			25.4 X 25.4 X 1.65		1.24		
X .100		1.14	0.335	.359	X 2.54		1.69	216	9.12
1 1/4 X 1 1/4 X .100		1.48	0.436	.461	31.8 X 31.8 X 2.54		2.20	281	11.7
1 1/2 X 1 1/2 X .065		1.269			38.1 X 38.1 X 1.65		1.90		
X .100		1.82	0.535	.563	X 2.54		2.71	345	14.3
X .188		3.05	0.896	.520	X 4.78		4.54	578	13.2
1 3/4 X 1 3/4 X .100		2.24	0.634	.666	44.5 X 44.5 X 2.54		3.21	410	16.9
2 X 2 X .100		2.58	0.734	.769	50.8 X 50.8 X 2.54		3.87	474	19.5
X .125		3.06	0.899	.756	X 3.18		4.55	580	19.2
X .188		4.33	1.27	.724	X 4.78		6.45	821	18.4
X .250		5.43	1.60	.693	X 6.35		8.05	1030	17.6
2 1/2 X 2 1/2 X .125		3.91	1.15	.961	63.5 X 63.5 X 3.18		5.82	741	24.4
X .188		5.59	1.64	.929	X 4.78		8.35	1060	23.6
X .237 FC		6.81	1.95	.909	X 6.02 FC		10.2	1260	23.1
3 X 3 X .125		4.76	1.40	1.17	76.2 X 76.2 X 3.18		7.09	903	29.6
X .188		6.90	2.03	1.13	X 4.78		10.3	1310	28.8
X .250		8.80	2.59	1.10	X 6.35		13.1	1670	28.0
3 1/2 X 3 1/2 X .125		5.59	1.64	1.37	88.9 X 88.9 X 3.18		8.31	1060	34.7
X .188		8.17	2.40	1.34	X 4.78		12.2	1550	34.0
X .250		10.5	3.08	1.31	X 6.35		15.6	1990	33.2
4 X 4 X .125		6.44	1.89	1.57	101.6 X 101.6 X 3.18		9.58	1220	39.9
X .188		9.43	2.77	1.54	X 4.78		14.1	1790	39.2
X .250		12.2	3.60	1.51	X 6.35		18.2	2320	38.4
X .375		17.3	5.08	1.45	X 9.53		25.7	3280	36.8
5 X 5 X .188		12.0	3.53	1.95	127 X 127 X 4.78		17.9	2280	49.6
X .250		15.6	4.59	1.92	X 6.35		23.2	2960	48.8
6 X 6 X .188		14.6	4.28	2.36	152.4 X 152.4 X 4.78		21.7	2760	59.9
X .250		19.0	5.60	2.33	X 6.35		28.3	3610	59.2
8 X 8 X .250		26.2	7.60	3.15	203.2 X 203.2 X 6.35		38.4	4900	79.9

FC = Flash Controlled



**RECTANGULAR STEEL TUBING or
HOLLOW STRUCTURAL SECTIONS (H.S.S)**

Stock Lengths 24 ft to 5", 48 ft for 6" and over

IMPERIAL						METRIC					
Size Inches	Wall Inches	Weight Lbs per ft.	Area Sq. Inches	Radius of Gyration		Size Millimeters	Wall mm	Mass KG per M	Area Sq. mm	Radius of Gyration	
				r x-x (in.)	r y-y (in.)					r x-x (mm)	r y-y (mm)
1 X ½ X .065		0.67				25.4 x 12.7 X 1.6		1.0			
2 X 1 X .100		1.82	.535	.689	.398	50.8 X 25.4 X 2.54		2.71	345	17.5	10.1
2 X 1 1/2 X .125		2.76				50.8 X 38.1 X 3.18		4.14			
2 1/2 X 1 1/2 X .188		4.32	1.27	.851	.565	63.5 X 38.1 X 4.78		6.43	821	21.6	14.3
3 X 1 X .125		3.05	.897	.980	.401	76.2 X 25.4 X 3.18		4.54	579	24.9	10.2
3 X 1 1/2 X .125		3.48	1.02	1.05	.606	76.2 X 38.1 X 3.18		5.17	660	26.6	15.4
3 X 2 X .125		3.90	1.15	1.10	.800	76.2 X 50.8 X 3.18		5.81	741	27.8	20.3
X .188		5.59	1.64	1.06	.772	X 4.78		8.35	1060	27.0	19.6
X .250		7.11	2.09	1.03	.740	X 6.35		10.6	1350	26.1	18.8
4 X 2 X .125		4.76	1.40	1.42	.827	101.6 X 50.8 X 3.18		7.09	903	36.1	21.0
X .188		6.90	2.03	1.38	.799	X 4.78		10.3	1310	35.1	20.3
X .250		8.80	2.59	1.35	.768	X 6.35		13.1	1670	34.2	19.5
4 X 3 X .125		5.59	1.64	1.51	1.21	101.6 X 76.2 X 3.18		8.31	1060	38.3	30.7
X .188		8.17	2.40	1.48	1.18	X 4.78		12.2	1550	37.5	30.0
X .250		10.5	3.08	1.44	1.15	X 6.35		15.6	1990	36.7	29.3
5 X 2 X .188		8.16	2.40	1.69	.812	127.0 X 50.8 X 4.78		12.2	1550	43.1	20.7
5 X 2 1/2 X .188		8.80	2.59	1.76	1.02	127.0 X 63.5 X 4.78		13.1	1670	44.6	25.9
5 X 3 X .188		9.43	2.78	1.81	1.21	127.0 X 76.2 X 4.78		14.1	1790	45.9	30.8
6 X 2 X .125		6.46	1.86	2.05	.858	152.4 X 50.8 X 3.18		9.68	1200	52.1	21.8
X .188		9.45	2.77	2.00	.829	X 4.78		14.2	1790	50.8	21.1
6 X 3 X .188		10.7	3.15	2.13	1.24	152.4 X 76.2 X 4.78		15.9	2030	54.0	31.4
X .250		13.9	4.09	2.09	1.20	X 6.35		20.7	2640	53.0	30.6
6 X 4 X .188		12.0	3.52	2.22	1.63	152.4 X X 4.78		17.9	2280	56.5	41.3
X .250		15.6	4.59	2.19	1.60	101.6 X 6.35		23.2	2960	55.7	40.6
7 X 5 X .250		19.0	5.60	2.61	2.01	177.8 X X 6.35		28.3	3610	66.2	51.1
						127.0					
8 X 2 X .188		11.9	3.50	2.59	.85	203.2 X 50.8 X 4.78		17.7	2260	65.8	21.6
8 X 3 X .188		13.3	3.89	2.76	1.27	203.2 X 76.2 X 4.78		19.8	2520	70.0	32.3




STEEL PIPE SIZES

A53 Grade B Untested

Stock Lengths 21 ft

Nominal Size Inches	Outside Diameter Inches	Schedule						Schedule 40
		40 (Standard Wall)			80 (Heavy Wall)			Also Stocked in Pre-Galvanized
		Wall	Inside Dia.	lbs per ft.	Wall	Inside Dia.	lbs per ft.	
1/8	0.405	0.068	0.269	0.2447				
1/4	0.54	0.088	0.364	0.4248				
3/8	0.675	0.091	0.493	0.5676				
1/2	0.84	0.109	0.622	0.851	0.147	0.546	1.088	
3/4	1.05	0.113	0.824	1.131	0.154	0.742	1.474	
1	1.315	0.133	1.049	1.679	0.179	0.957	2.172	Yes
1 1/4	1.66	0.14	1.38	2.273	0.191	1.278	2.997	Yes
1 1/2	1.9	0.145	1.61	2.718	0.2	1.5	3.631	Yes
2	2.375	0.154	2.067	3.653	0.218	1.939	5.022	Yes
2 1/2	2.875	0.203	2.469	5.793	0.276	2.323	7.661	Yes
3	3.5	0.216	3.068	7.576	0.3	2.9	10.25	
3 1/2	4	0.226	3.548	9.109	0.318	3.364	12.51	
4	4.5	0.237	4.026	10.79	0.337	3.826	14.98	
5	5.563	0.258	5.047	14.62				
6	6.625	0.28	6.065	18.97				
8	8.625	0.322	7.981	28.55				

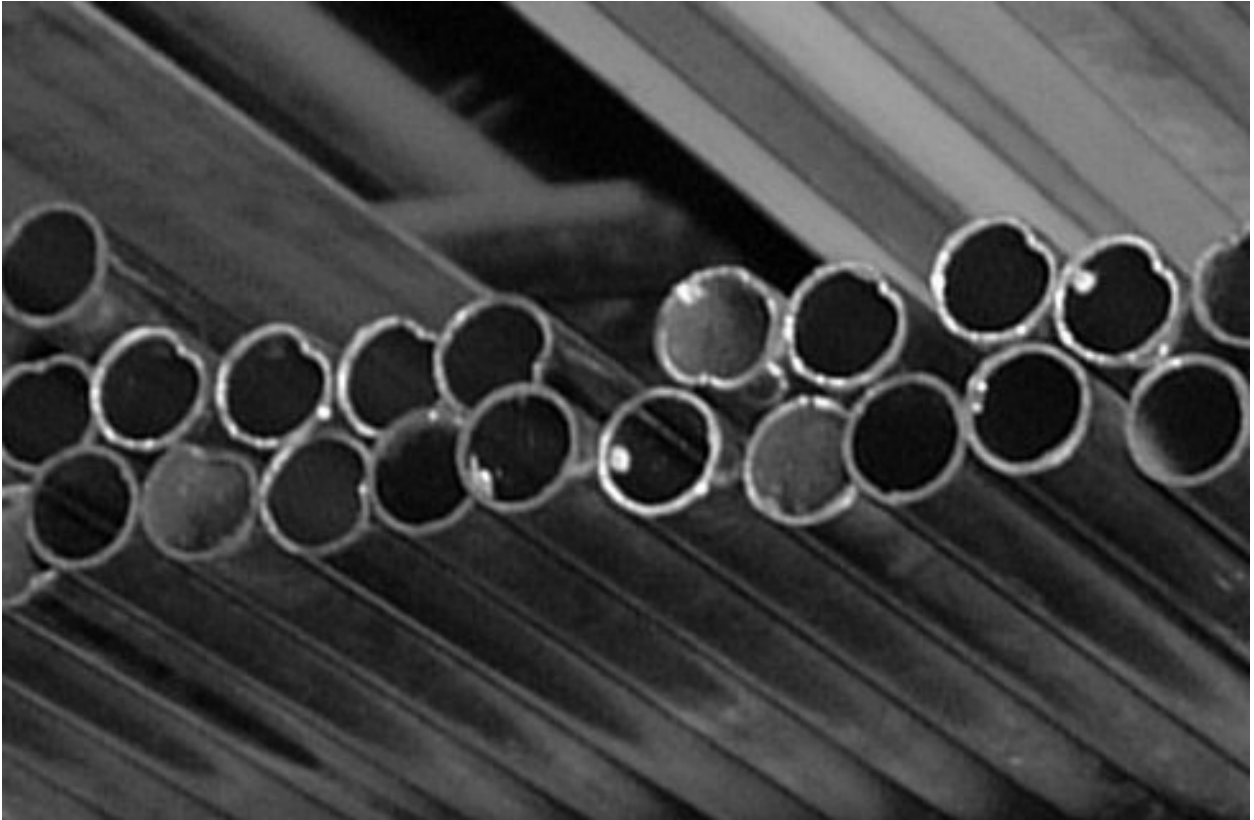

Welded Round Steel Tubes

Commercial Quality

Stock Lengths - 20 or 24 ft (please inquire)

Outside Diameter inches	Wall Thickness inches	Inside Diameter inches	Weight lbs per ft
1/2 X	.049	.402	.236
	.065	.37	.302
5/8 X	.065	.495	.389
3/4 X	.065	.62	.4755
7/8 X	.065	.745	.562
1 X	.065	.87	.6491
	.120	.76	1.128
1 1/8 X	.065	.995	.7359
1 1/4 X	.125	1.0	1.448
1 1/2 X	.065	1.37	.9962
	.125	1.25	1.769
1.66 X	.125	1.41	2.05
1 3/4 X	.120	1.5	2.089
2 X	.125	1.75	2.503
3 X	.125	2.75	3.838
6 5/8 X	.188	6.25	12.9




Round Steel Seamless Tubes

Drawn Over Mandrel

Stock Lengths - 17 to 24 ft randoms

Outside Diameter inches	Wall Thickness inches	Inside Diameter inches	Weight lbs per ft
1.0 X .250		.500	2.003
1.25 X .250		.750	2.67
1.5 X .375		.750	4.51
1.625 X .250		1.125	3.671
1.75 X .500		.750	6.68
2 X .375		1.25	6.508
.500		1.00	8.02
2.25 X .375		1.50	7.509
2.5 X .250		2.00	6.008
.500		1.50	10.68
3.0 X .500		2.00	13.35
3.5 X .500		2.50	16.03
4.0 X .500		3.0	18.69



COLD FINISHED STEEL BARS

ROUNDS


AISI C 1018/1020

Stock Lengths

10 to 12 ft Randoms to 7/16" dia.

20 to 22 ft Randoms 1/2" dia. and Over

Diameter Inches	Weight lbs per ft	Diameter Inches	Weight lbs per ft
1/8	.042	1	2.67
3/16	.094	1 1/8	3.38
1/4	.167	1 1/4	4.17
5/16	.261	1 3/8	5.05
3/8	.376	1 7/16	5.52
7/16	.511	1 1/2	6.01
1/2	.668	1 3/4	8.18
9/16	.845	1 15/16	10.02
5/8	1.043	2	10.68
11/16	1.260	2 1/2	16.69
3/4	1.50	3	24.03
13/16	1.76	4	42.73
7/8	2.05	5	66.75
15/16	2.35	6	96.13




COLD FINISHED STEEL BARS

ROUNDS

AISI C 12L14 Free Machining

Stock Lengths 10 to 12 ft Randoms

Diameter Inches	Weight lbs per ft
3/16	.094
1/4	.167
5/16	.261
3/8	.376
7/16	.511
1/2	.668
9/16	.845
5/8	1.040
3/4	1.500
7/8	2.05
15/16	2.35
1	2.67
1 1/8	3.38
1 1/4	4.17
1 1/2	6.01
1 3/4	8.18
2	10.68
3	24.03
4	42.73



STRESSPROOF BARS


ROUNDS AISI C 1144

Yield Strength 100,000 lbs
per sq in

Stock Lengths 20 to 22 ft

Randoms

Diameter Inches	Weight lbs per ft
3/8	.376
1/2	.668
5/8	1.040
3/4	1.50
7/8	2.04
1	2.67
1 1/4	4.17
1 3/8	5.05
1 1/2	6.01
2	10.68





STEEL DRILL RODS

HIGH CARBON ROUNDS

AISI W-1 Water Hardening

Polished, Annealed Condition

Stock Lengths 3 ft

Diameter Inches	Weight lbs per ft
1/8	.042
5/32	.065
3/16	.094
1/4	.167
5/16	.261
3/8	.375
7/16	.511
1/2	.667
5/8	1.04
3/4	1.50
7/8	2.05
1	2.67

STEEL DRILL RODS

HIGH CARBON ROUNDS

AISI O-1 Oil Hardening

Polished, Annealed Condition

Stock Lengths 3 ft

Diameter Inches	Weight lbs per ft
1/8	.042
5/32	.065
3/16	.094
1/4	.167
5/16	.261
3/8	.375
7/16	.511
1/2	.667
5/8	1.04
3/4	1.50
7/8	2.05
1	2.67



STEEL THREADED RODS


National Course Threads

AISI C 1010

Unplated


Stock Lengths 10 ft

U.N.C. SIZE	
DESIGNATION	
Major Diameter -	Threads per Inch
1/4" - 20	
5/16" - 18	
3/8" - 16	
1/2" - 13	
5/8" - 11	
3/4" - 10	
7/8" - 9	
1" - 8	


COLD FINISHED STEEL BARS
FLATS
AISI C 1018/1020

Stock Lengths 10 to 12 ft Randoms

Size Inches	Weight lbs per ft	Size Inches	Weight lbs per ft
1/8 X 3/8	.159	3/8 X 1/2	.638
1/2	.213	3/4	.956
5/8	.266	1	1.275
3/4	.319	1 1/4	1.59
1	.425	1 1/2	1.913
1 1/4	.531	2	2.55
1 1/2	.638	3	3.825
2	.850	4	5.1
3	1.275	6	7.65
3/16 X 1/4	.159	1/2 X 5/8	1.063
1/2	.319	3/4	1.275
5/8	.398	1	1.7
3/4	.478	1 1/4	2.125
1	.638	1 1/2	2.55
1 1/4	.797	2	3.4
1 1/2	.956	2 1/2	4.25
2	1.275	3	5.1
2 1/2	1.594	4	6.8
3	1.913	6	10.2
4	2.55	5/8 X 1	2.125
1/4 X 3/8	.319	1 1/2	3.188
1/2	.425	2	4.25
5/8	.531	3	6.38
3/4	.638	3/4 X 1	2.55
1	.85	1 1/2	3.825
1 1/4	1.063	2	5.1
1 1/2	1.275	3	7.65
2	1.7	1 X 1 1/2	5.1
2 1/2	2.215	2	6.8
3	2.55	3	10.2
4	3.4	4	13.6
5	4.25	5	17.0
6	5.1	1 1/2 X 3	15.3




COLD FINISHED STEEL BARS

HEXAGONS

AISI C 12L14

Stock Lengths 10 to 12 ft Randoms

Size Across Flats Inches	Weight lbs per ft
3/16	.103
1/4	.184
5/16	.285
3/8	.414
7/16	.564
1/2	.736
9/16	.932
5/8	1.15
11/16	1.39
3/4	1.66
7/8	2.25
1	2.82
1 1/8	3.73
1 1/4	4.6
1 3/8	5.67
1 1/2	6.63



COLD FINISHED STEEL BARS

SQUARES

AISI C 1018/1020

Stock Lengths 10 to 12 ft Randoms

Size Inches	Weight lbs per ft
3/16	.120
1/4	.213
5/16	.332
3/8	.478
7/16	.511
1/2	.85
5/8	1.33
3/4	1.91
7/8	2.6
1	3.4
1 1/8	4.3
1 1/4	5.31
1 1/2	7.65
2	13.6



HOT ROLLED STEEL SHEETS
COMMERCIAL QUALITY


Thickness Inches	Gauge	Weight lbs per sq ft	Stock Sheet Sizes			
			4' by 8'	4' by 10'	5' by 10'	6' by 12'
.0598	16	2.5	√	√		
.0747	14	3.125	√	√	√	
.1046	12	4.375	√	√	√	√
.1196	11	5.1	√	√	√	√
.1345	10	5.625	√	√	√	√



STEEL PLATES

Commercial quality or 44W (300W)

Thickness Inches	Weight lbs per sq ft	Stock Plate Sizes				
		4' by 8'	4' by 10'	4' by 12'	5' by 10'	6' by 12'
3/16	7.66	√	√		√	√
1/4	10.21	√	√	√	√	√
5/16	12.76	√	√			
3/8	15.32	√	√		√	
1/2	20.42	√			√	
5/8	25.53	√				
3/4	30.63	√				
1	40.84	√				
1 1/4	51.0	√				
1 1/2	61.26	√				
2	81.68	√				

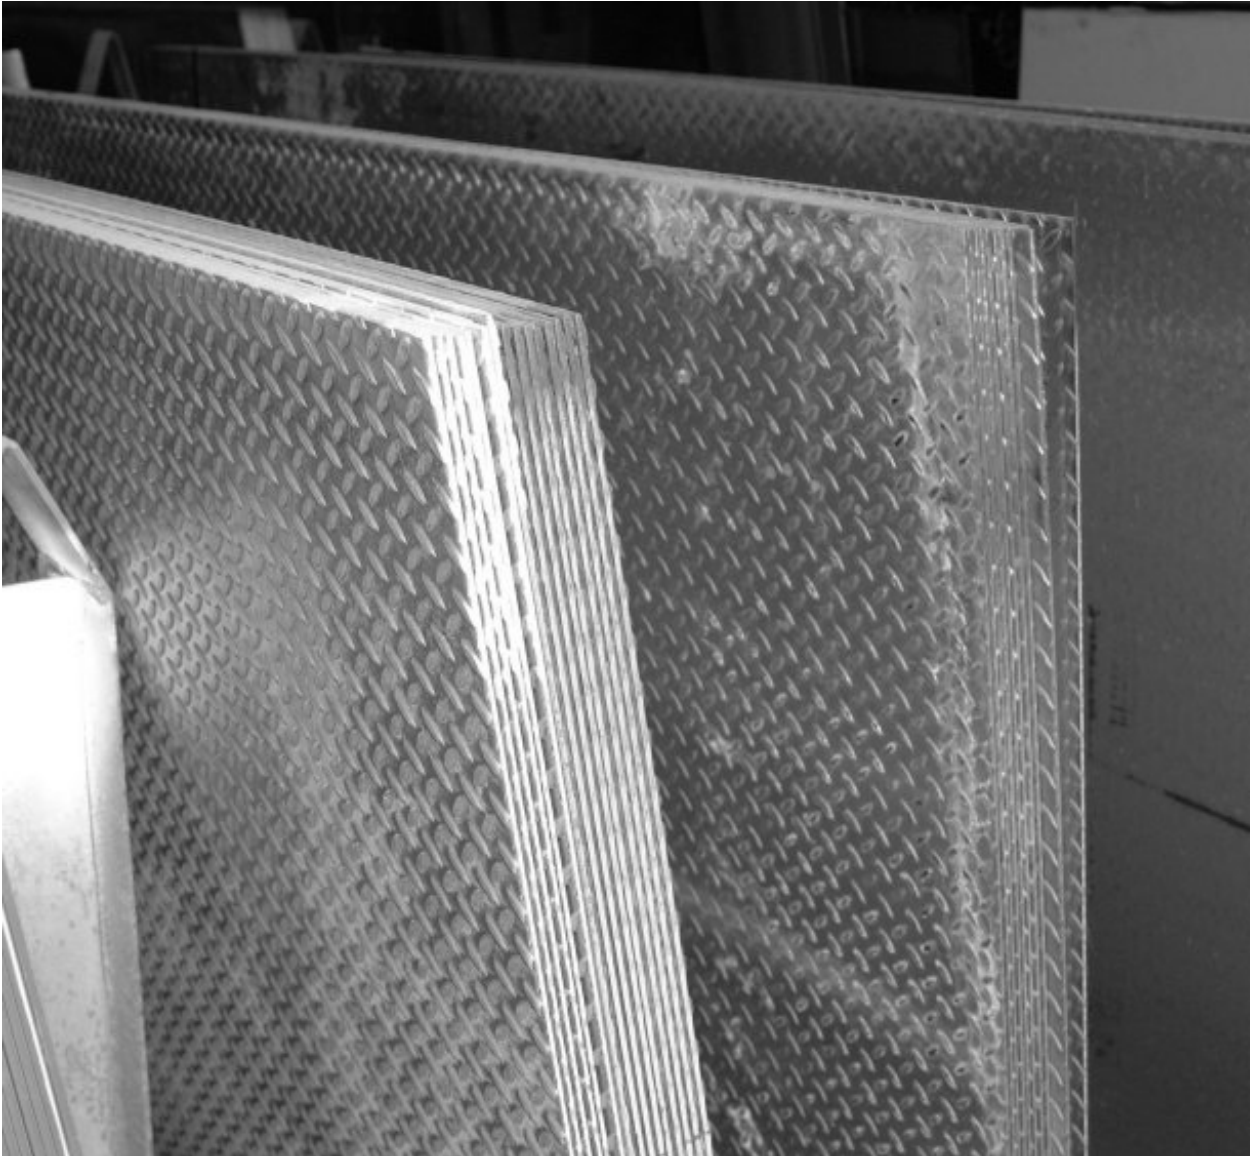

STEEL FLOOR PLATE
or **CHECKER PLATE**
Commercial Quality

Thickness Inches	Weight lbs per sq ft	Stock Plate Sizes		
		4' by 8'	4' by 10'	5' by 10'
14 guage (.075")	3.75	√		
1/8	6.15	√	√	√
3/16	8.7	√	√	√
1/4 (6 mm)	11.25	√	√	√
3/8	16.35	√		



Heat Treated Plates (Algoma Q & T)

Abrasion Resistant Quenched and Tempered Steel Plates

Algoma ALGOTUFF 400 commonly stocked in 4 ft by 8 ft sheets.
This material is flame-cut to the desired size.

ALGOTUFF is used for wear plates, truck and hopper liners, cutting edges, as well as other applications requiring resistance to high levels of abrasive wear.

Brinell Hardness range BHN 400/477

Typical tensile strength 200,000 PSI

Typical yield strength 190,000 PSI

Weldable

Moderately formable

**AlgoTuff 400 Quench &
Tempered Steel Plate
Abrasion-resistant**

Stock Sheets 4 ft by 8 ft

Thickness Inches	Weight lbs per sq ft
1/4	10.2
3/8	15.3
1/2	20.4
3/4	30.6
1	40.8



COLD ROLLED STEEL SHEETS

Stock Sheets 4 ft by 8 ft

and 2 ft x 4 ft where noted

Thickness Inches	Gauge	Weight lbs per sq ft	
.018	26	.750	
.024	24	1.00	2' x 4'
.030	22	1.25	2' x 4'
.036	20	1.50	2' x 4'
.048	18	2.00	2' x 4'
.060	16	2.50	
.120	11	5.00	



GALVANIZED STEEL SHEETS

Stock Sheets 4 ft by 8 ft



Thickness Inches	Gauge	Weight lbs per sq ft
0.0217	26	.906
0.0276	24	1.156
0.0336	22	1.406
0.0396	20	1.656
0.0516	18	2.156
0.0635	16	2.656
0.123	11	5.15



**SATIN COAT STEEL SHEETS
or GALVANNEAL STEEL SHEETS**

Stock Sheets 4 ft by 8 ft

Thickness Inches	Gauge	Weight lbs per sq ft
0.0276	24	1.156
0.0336	22	1.406
0.0396	20	1.656
0.0516	18	2.156
0.0635	16	2.656

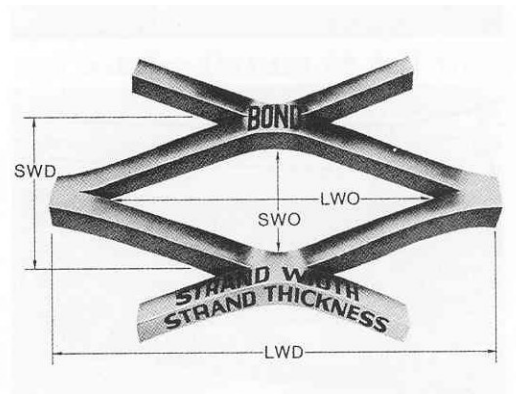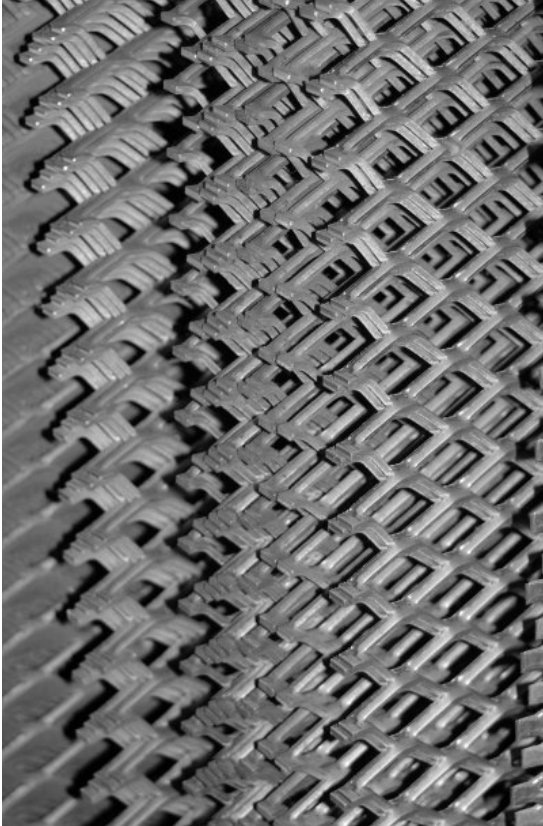

REGULAR EXPANDED METAL



Carbon Steel

Stock Sheets 4 ft by 8 ft

STYLE	WEIGHT lbs per 100 sq. ft.	SIZE OF OPENING Inches		CENTRE TO CENTRE OF BOND Inches		SIZE OF STRANDS Inches		OVERALL THICKNESS Inches	PERCENT OPEN AREA
		SWD	LWD	SWD	LWD	WIDTH	THICKNESS		
5/16" - # 18	104	.188	.688	.333	1.00	.094	.048	.170	48
1/2" - # 16	86	.375	.938	.500	1.20	.087	.060	.175	65
3/4" - # 9 (10 ga.)	180	.688	1.562	.923	2.00	.150	.135	.312	68
1" - # 14	78	.875	1.563	1.00	2.25	.125	.074	.225	75
1" - # 10	170	.750	1.563	1.00	2.25	.155	.135	.375	62
1 1/2" - # 10 H	200	.830	2.375	1.33	3.00	.240	.135	.460	72

SWD Denotes Short Way Diamond

LWD Denotes Long Way Diamond

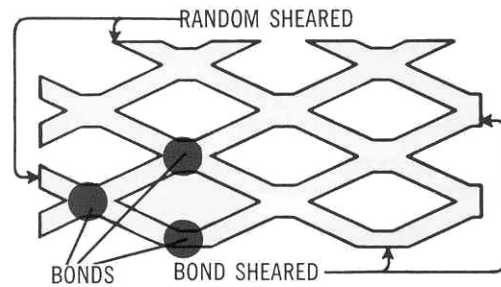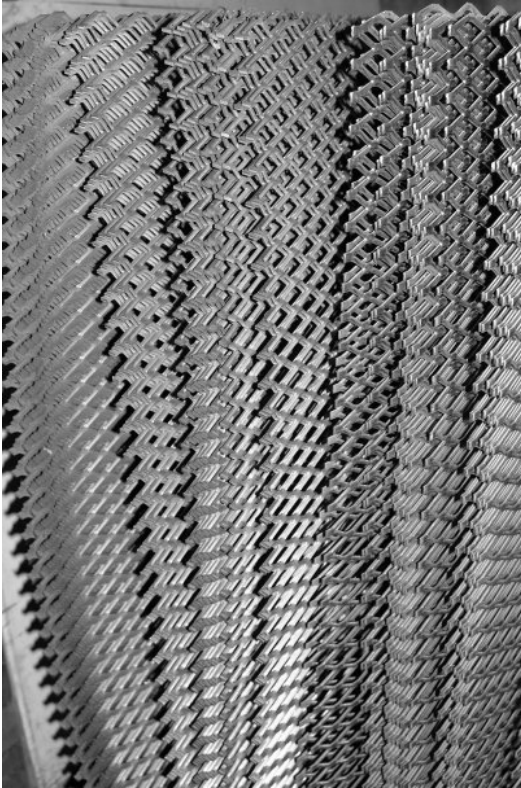

FLATTENED EXPANDED METAL



Carbon Steel

Stock Sheets 4 ft by 8 ft

STYLE	WEIGHT lbs per 100 sq. ft.	SIZE OF OPENING Inches		CENTRE TO CENTRE OF BOND Inches		SIZE OF STRANDS Inches		OVERALL THICKNESS Inches	PERCENT OPEN AREA
		SWD	LWD	SWD	LWD	WIDTH	THICKNESS		
3/16" - # 20 F	86	.094	.343	.218	.500	.063	.032	.032	43
1/4" - # 20 F	88	.084	.715	.250	1.05	.079	.030	.030	35
1/2" - # 16 F	82	.312	1.00	.500	1.25	.096	.039	.039	63
1/2" - # 13 F	140	.312	1.00	.500	1.25	.107	.070	.070	52
1" - # 14 F	63	.813	2.00	1.00	2.30	.125	.070	.070	80
1" - # 10 F	165	.750	1.90	1.00	2.30	.160	.110	.110	58

SWD Denotes Short Way Diamond

LWD Denotes Long Way Diamond

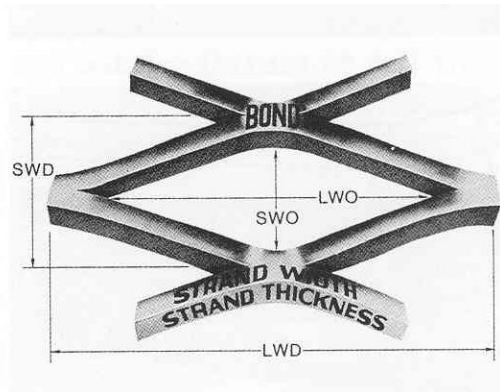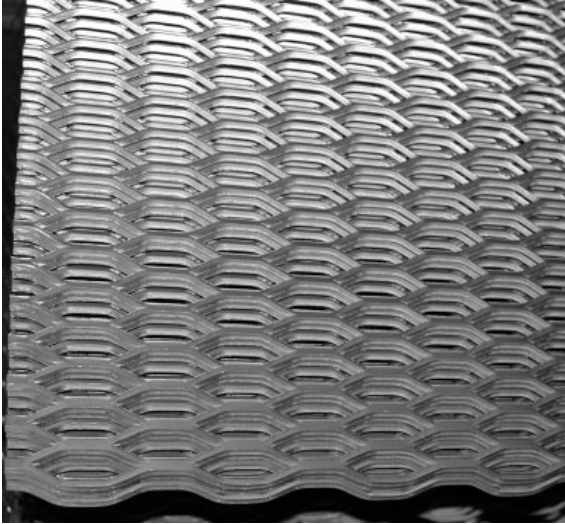

STRUCTURAL GRATING

Stock Sheets 8 ft by 4 ft

STYLE	WEIGHT lbs per sq. ft.	SIZE OF OPENING Inches		CENTRE TO CENTRE OF BOND Inches		SIZE OF STRANDS Inches		OVERALL THICKNESS Inches	PERCENT OPEN AREA
		SWD	LWD	SWD	LWD	WIDTH	THICKNESS		
3 lb	3	0.94	3.44	1.33	5.33	0.264	0.183	0.54	60
4 lb	4	0.94	3.44	1.33	5.33	0.3	0.215	0.618	55
5 lb	5	0.813	3.38	1.33	5.33	0.331	0.25	0.655	50

SWD Denotes Short Way Diamond

LWD Denotes Long Way Diamond

STRUCTURAL GRATING

Concentrated and Uniform Load Deflection /

Fixed Span

STYLE lbs per sq ft		SPAN		
		24"	36"	48"
3 lb	U	275	100	
	D	0.25	0.22	
	C	275	165	75
4 lb	D	0.25	0.25	0.25
	U	350	150	50
	D	0.24	0.245	0.25
5 lb	C	440	220	100
	D	0.25	0.25	0.25
	U	600	175	100
5 lb	D	0.24	0.24	0.25
	C	540	310	140
	D	0.245	0.25	0.25

U = Uniform Load in lbs per sq ft


C = Concentrated Load in lbs per lineal ft

D = Deflection in inches

STRUCTURAL GRATING

Selection Chart

CONCENTRATED LOAD lbs per ft of length of catwalk or platform	CLEAR SPAN Style				
	23"	30"	35"	42"	47"
50 lbs Light or Occasional Pedestrian Traffic	3 lb	3 lb	3 lb	3 lb	3 lb
100 lbs Normal or Frequent Pedestrian Traffic	3 lb	3 lb	3 lb	4 lb	5 lb
150 lbs Heavy or Constant Pedestrian Traffic	3 lb	4 lb	4 lb	5 lb	
200 lbs Pedestrian Traffic with Light Equipment	3 lb	4 lb	5 lb		
250 lbs Pedestrian Traffic with Light Equipment	4 lb	5 lb	5 lb		




Cold Rolled Perforated Steel Sheets

Stock Sheets 4 ft by 8 ft

Round holes, staggered pattern

Thickness	Hole Diameter	Spacing centre to centre	% Open Area
.120	1/8	3/16	41
.060	1/8	3/16	41
.060	3/16	1/4	51
.060	1/4	3/8	42
.060	1/2	11/16	48

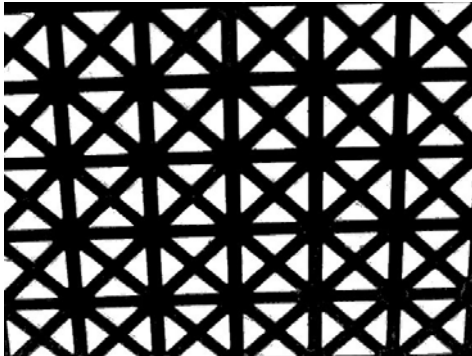


Cold Rolled Perforated Steel Sheets

Stock Sheets 2 ft by 3 ft

Decorative Pattern

Thickness	Design	% Open Area
.024	Grecian	35

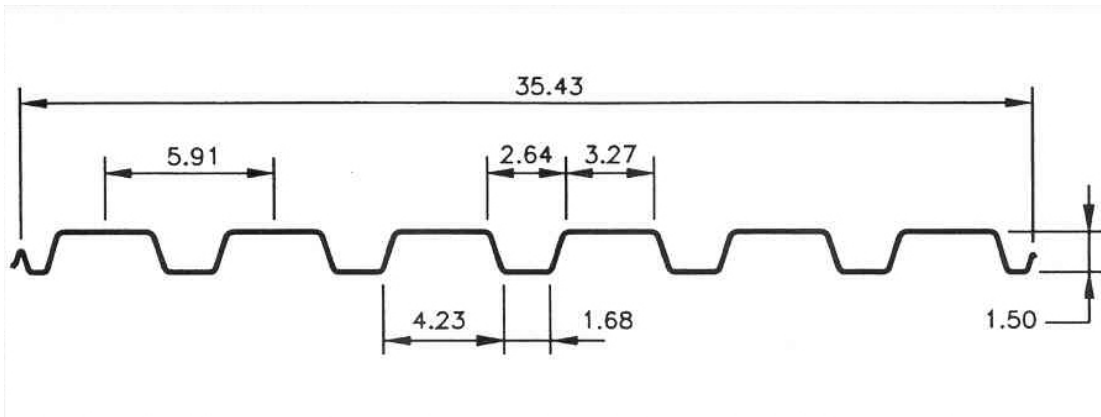

STEEL ROOF DECK

Type RD 938

Stock Panels 3 ft x 24 ft

Nominal Thickness .030 inches

Galvanized Coating to spec. Z 275

Loading Table - Uniformly Distributed


Load in Pounds per Square Foot

Support	Piece Supported Over			
Spacing inches		1-Span	2-Spans	3-Spans
48	B	154	165	190
	D	151	f	f
54	B	121	131	163
	D	106	f	f
60	B	98	106	132
	D	77	f	f
66	B	81	88	109
	D	58	f	f
72	B	68	74	92
	D	45	f	84
78	B	58	63	78
	D	35	f	66
84	B	50	54	68
	D	28	f	53
90	B			59
	D			43
96	B			52
	D			36

B - Denotes total loading for allowable working stress.

D - Denotes total loading for allowable deflection of 1/240th span.

f - indicates the load for stress to govern.

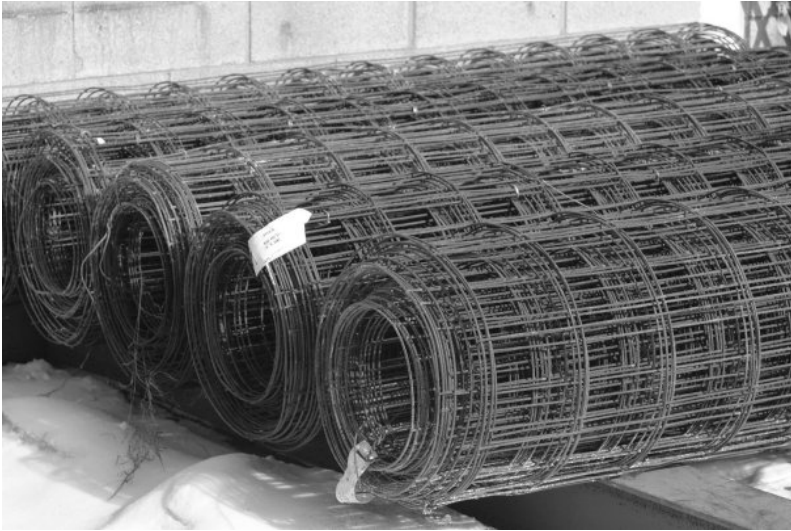


WELDED WIRE CONSTRUCTION FABRIC

ASTM A185

CSA G30.5

STYLE	Stock Size		
	4' by 8' Sheets	6' by 200' Rolls	6' by 100' Rolls
6 X 6 X 10/10		√	√
6 X 6 X 9/9	√		

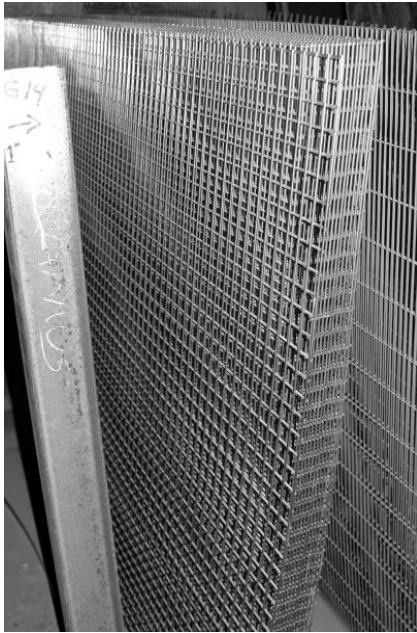

**ARCHITECTURAL
WELDED WIRE MESH**

Stock Sheets 4 ft by 8 ft

STYLE
Inches
1 X 1 X 1/8
2 X 2 X 1/8





Ladder Rung

13 ga. HRPO Steel

Stock Lengths - 5 ft

Width inches	Height inches	Weight lbs per ft
1 5/8	1 1/8	1.3
2 1/4	1 1/2	1.5

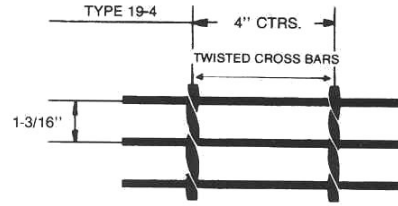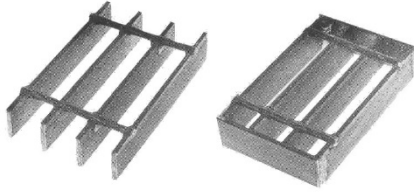

WELDED BAR GRATING

Standard Flowforge Type 19-4 (meets N.A.A.M.M. standards)

Bearing Bars 1-3/16" Centres

Stock Mats 3 ft nominal by 24 ft


BEARING BAR SIZE inches	WEIGHT (APPROX) lbs per sq ft	SPAN													
			2'-0"	2'-6"	3'-0"	3'-6"	4'-0"	4'-6"	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	8'-0"	9'-0"
3/4 X 3/16	5.58	U	578	370	258	188	144	115							
		D	.095	.151	.216	.295	.374	.486							
		C	578	462	386	331	289	257							
		D	.076	.119	.173	.234	.308	.389							
1 X 1/8	5.03	U	686	439	304	224	171	135	109	91	76				
		D	.072	.111	.159	.219	.288	.366	.451	.547	.673				
		C	686	549	457	392	343	305	275	250	228				
		D	.057	.090	.129	.176	.231	.293	.360	.434	.518				
1 X 3/16	7.23	U	1029	659	459	338	257	203	164	135	114				
		D	.072	.111	.159	.219	.288	.366	.451	.547	.673				
		C	1029	824	686	587	514	458	412	375	343				
		D	.057	.090	.129	.176	.231	.293	.360	.434	.518				
1 1/4 X 1/8	6.12	U	1072	686	476	350	268	212	172	142	119	101	87		
		D	.057	.090	.129	.176	.231	.291	.358	.433	.520	.608	.704		
		C	1072	858	716	613	536	477	430	390	358	330	306		
		D	.046	.072	.104	.141	.183	.233	.288	.349	.416	.487	.565		
1 1/4 X 3/16	8.87	U	1608	1028	716	526	403	318	258	213	179	152	131		
		D	.057	.090	.129	.176	.231	.291	.358	.433	.520	.608	.704		
		C	1608	1285	1073	918	803	716	644	585	536	495	459		
		D	.046	.072	.104	.141	.183	.233	.288	.349	.416	.487	.565		
1 1/2 X 1/8	7.23	U	1544	987	686	505	387	306	248	205	172	149	128	96	75
		D	.047	.075	.106	.147	.192	.243	.300	.365	.433	.506	.587	.774	.978
		C	1544	1235	1029	883	772	687	619	563	515	475	441	386	342
		D	.038	.059	.087	.117	.154	.195	.241	.289	.347	.406	.470	.614	.777
1 1/2 X 3/16	10.51	U	2321	1485	1031	758	581	458	371	307	260	222	191	145	115
		D	.047	.075	.106	.147	.192	.243	.300	.365	.433	.506	.587	.774	.978
		C	2321	1856	1547	1325	1159	1031	928	844	773	714	663	581	515
		D	.038	.059	.087	.117	.154	.195	.241	.289	.347	.406	.470	.614	.777

U = Uniform Load in lbs per sq ft

C = Concentrated Load in lbs per ft of grating length


D = Deflection in inches

Note: Spans and loads to the right of the heavy line exceed a deflection of 1/4" for uniform loads of 100 lbs per sq ft.

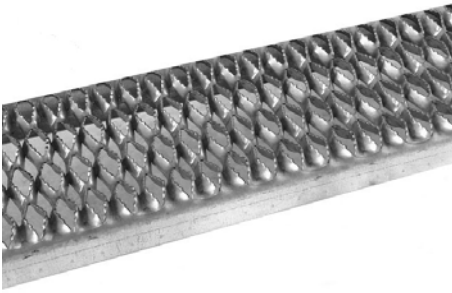
DECK SPAN

Stock Lengths 12 ft

WIDTH	DEPTH	THICK- NESS	WEIGHT	TABLE OF ALLOWABLE LOADS (lbs)														
				SINGLE SPAN CONDITION														
inches	inches	Gauge	lbs per lin ft		2'-0"	2'-6"	3'-0"	3'-6"	4'-0"	4'-6"	5'-0"	5'-6"	6'-0"	7'-0"	8'-0"	9'-0"	10'-0"	
4 3/4	1 1/2	14	2.3	U			591	435	334	265	215	179	151					
				D	.06	.10	.14	.20	.26	.32	.40	.49	.58					
				C	524	420	351	301	265	236	213	195	179					
				D	.05	.08	.11	.16	.20	.26	.32	.39	.47					
		12	3.2	U			782	576	443	351	286	237	200	149	116			
				D	.07	.11	.15	.21	.27	.35	.43	.52	.62	.86	1.14			
				C	693	556	464	399	350	313	283	258	238	206	183			
				D	.05	.08	.12	.17	.22	.28	.34	.42	.50	.69	.91			
	2	14	2.6	U				721	553	438	356	295	248	184	142	113	93	
				D	.06	.09	.13	.17	.23	.29	.35	.43	.51	.70	.92	1.18	1.47	
				C		697	582	499	438	390	352	321	295	255	225	201	183	
				D	.04	.07	.10	.14	.18	.23	.28	.34	.41	.56	.74	.94	1.18	
		12	3.6	U					703	557	453	375	317	235	181	145	119	
				D	.05	.08	.11	.16	.20	.26	.32	.39	.46	.64	.84	1.07	1.34	
				C			739	635	557	496	448	409	376	325	287	258	235	
				D	.04	.06	.09	.12	.16	.21	.26	.31	.37	.51	.67	.86	1.07	
7	1 1/2	14	3.0	U		577	402	269	227	180	147	122	103					
				D	.06	.10	.14	.20	.26	.33	.40	.49	.59					
				C	524	421	351	302	265	237	214	196	180					
				D	.05	.08	.11	.16	.21	.26	.32	.39	.47					
		12	4.1	U		763	532	392	301	239	195	162	137	102	79			
				D	.07	.11	.15	.21	.27	.35	.43	.52	.63	.87	1.15			
				C	694	556	465	400	352	314	284	260	240	208	185			
				D	.05	.08	.12	.17	.22	.28	.34	.42	.50	.69	.92			
	2	14	3.2	U			665	490	376	298	242	201	169	125	97	77	63	
				D	.06	.09	.13	.17	.23	.29	.35	.43	.51	.71	.93	1.19	1.49	
				C		697	582	500	439	391	353	322	296	256	226	203	185	
				D	.04	.07	.10	.14	.18	.23	.28	.34	.41	.56	.74	.95	1.19	
		12	4.5	U				623	478	379	308	256	216	160	124	99	82	
				D	.05	.08	.11	.16	.20	.26	.32	.39	.47	.64	.85	1.08	1.36	
				C			740	636	558	498	450	410	378	327	289	260	238	
				D	.04	.06	.09	.12	.16	.21	.26	.31	.37	.51	.68	.87	1.09	
U = Uniform Load (lbs per ft)				2'-0"	2'-6"	3'-0"	3'-6"	4'-0"	4'-6"	5'-0"	5'-6"	6'-0"	7'-0"	8'-0"	9'-0"	10'-0"		

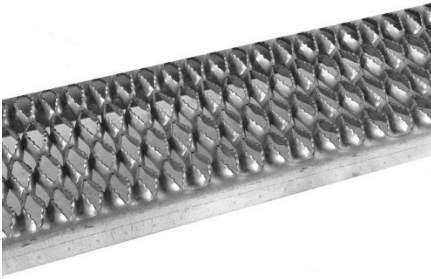
DECK SPAN

Stock Lengths 12 ft

WIDTH	DEPTH	THICK- NESS	WEIGHT	TABLE OF ALLOWABLE LOADS (lbs)													
				SINGLE SPAN CONDITION													
					2'-0"	2'-6"	3'-0"	3'-6"	4'-0"	4'-6"	5'-0"	5'-6"	6'-0"	7'-0"	8'-0"	9'-0"	10'-0"
inches	inches	Gauge	lbs per lin ft														
9 1/2	1 1/2	14	3.6	U	663	426	296	219	168	134	109	90	77				
				D	.06	.10	.14	.20	.26	.33	.41	.50	.59				
				C	525	421	352	303	266	238	215	197	182				
				D	.05	.08	.11	.16	.21	.26	.33	.40	.47				
		12	5.0	U		581	405	298	229	182	148	123	104	77	60		
				D	.07	.11	.16	.21	.28	.36	.44	.54	.64	.89	1.17		
				C	718	575	481	413	363	324	292	267	246	213	189		
				D	.06	.09	.13	.17	.23	.29	.35	.43	.52	.71	.94		
	2	14	3.8	U		705	491	362	278	220	179	148	125	93	72	58	47
				D	.06	.09	.13	.17	.23	.29	.36	.43	.52	.71	.94	1.20	1.51
				C	730	698	583	501	440	392	354	323	298	258	228	205	187
				D	.04	.07	.10	.14	.18	.23	.28	.35	.41	.57	.75	.96	1.20
		12	5.4	U			624	460	353	280	228	189	160	119	92	74	61
				D	.05	.08	.11	.16	.20	.26	.32	.39	.47	.65	.85	1.10	1.38
				C			741	637	559	499	451	412	380	329	292	264	241
				D	.04	.06	.09	.12	.16	.21	.26	.31	.37	.52	.68	.88	1.10
11 3/4	1 1/2	14	4.2	U	536	344	240	177	136	108	88	74	62				
				D	.06	.10	.14	.20	.26	.33	.41	.50	.60				
				C	525	402	353	304	267	239	216	198	183				
				D	.05	.08	.12	.16	.21	.26	.33	.40	.48				
		12	5.9	U	710	456	318	235	181	144	117	98	83	62	49		
				D	.07	.11	.15	.21	.28	.35	.44	.53	.64	.89	1.18		
				C	695	558	467	402	354	317	287	263	244	213	190		
				D	.05	.08	.12	.17	.22	.28	.35	.43	.51	.71	.95		
	2	14	4.4	U		571	397	293	225	178	145	120	102	76	59	47	
				D	.06	.09	.13	.17	.23	.29	.36	.43	.52	.71	.95	1.21	
				C	707	699	584	502	440	393	355	324	299	259	230	207	
				D	.04	.07	.10	.14	.18	.23	.29	.35	.42	.57	.76	.97	
		12	6.4	U		725	505	372	286	227	185	154	130	97	75	60	50
				D	.05	.08	.11	.16	.20	.26	.32	.39	.47	.65	.86	1.11	1.39
				C			742	638	561	501	453	414	382	332	295	266	243
				D	.04	.06	.09	.12	.16	.21	.26	.31	.38	.52	.69	.89	1.11
U = Uniform Load (lbs per ft)					2'-0"	2'-6"	3'-0"	3'-6"	4'-0"	4'-6"	5'-0"	5'-6"	6'-0"	7'-0"	8'-0"	9'-0"	10'-0"